




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04L 1/12</b>		A1	(11) International Publication Number: <b>WO 96/36146</b>
			(43) International Publication Date: 14 November 1996 (14.11.96)
(21) International Application Number: PCT/FI96/00259		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 8 May 1996 (08.05.96)			
(30) Priority Data: 952253 9 May 1995 (09.05.95) FI			
(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI).			
(72) Inventors; and (75) Inventors/Applicants (for US only): RÄSÄNEN, Juha [FI/FI]; Pensaskertuntie 8 A, FIN-02660 Espoo (FI). HÄMÄLÄINEN, Jari [FI/FI]; Matti-Tapion Katu 1 F 17, FIN-33720 Tampere (FI). KANERVA, Mikko [FI/FI]; Kaarnatie 1 F 58, FIN-00410 Helsinki (FI). KARI, Hannu [FI/FI]; Kullervonkuja 9 B 9, FIN-02880 Veikkola (FI). VAINIKKA, Jari [FI/FI]; Neilikkuja 5 B, FIN-01390 Vantaa (FI).		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(74) Agent: OY KOLSTER AB; Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).			

(54) Title: NON-TRANSPARENT DATA TRANSMISSION IN A DIGITAL TELECOMMUNICATIONS SYSTEM

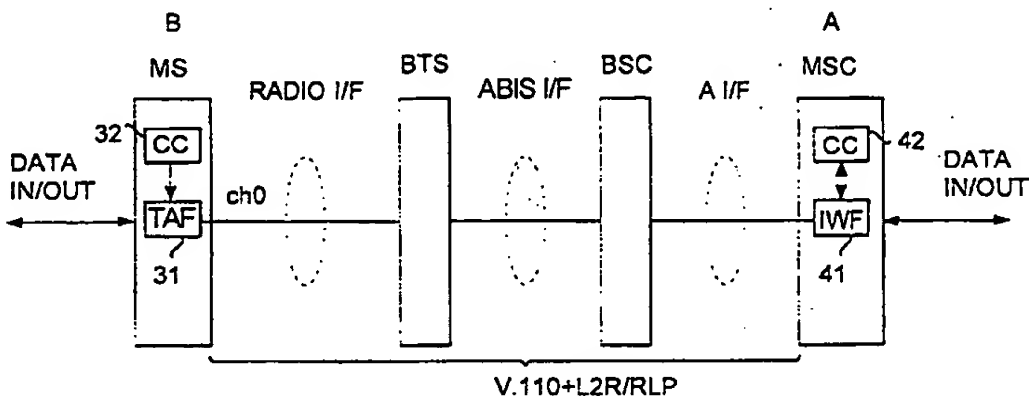

## (57) Abstract

The invention relates to a digital telecommunications system, and particularly a method for non-transparent data transmission. There is a non-transparent data connection (V.110+L2R/RLP) between a transmitting party (A) and a receiving party (B), on which channel coding is employed. The transmission buffer buffers the data frames to be transmitted and stores the transmitted data frames until it receives an acknowledgement of successful reception. In accordance with the invention, this is avoided by monitoring the quality of the non-transparent connection, and if the quality of the connection drops to a specific threshold value, by changing the channel coding scheme of the connection for a more efficient one. Simultaneously, however, more channel capacity is allocated for the connection in accordance with the chosen channel coding scheme so that the original nominal user data rate can be maintained unchanged or nearly unchanged.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo	KR	Republic of Korea	SG	Singapore
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LR	Liberia	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

Non-transparent data transmission in a digital telecommunications system

#### Field of the Invention

5           The present invention relates to non-transparent data transmission in a digital telecommunications system, in particular in a radio interface of a mobile communications system.

#### Background of the Invention

10           The problem in transmission over transmission channels that are sensitive to interference, such as the radio path, is often the poor quality of the transmission. Although several standardized end-to-end data services are actually provided with error  
15           correction protocols, which are applied either to the entire end-to-end connection or to some segments of the transmission path, these protocols are designed for error situations that are typical of fixed lines, but they are inadequate or unsuitable for special  
20           conditions, such as to a radio link. Therefore, it has been necessary to implement dedicated error correction solutions within the mobile communications system.

          Since no single solution is suitable for all data services, there are several types of connections  
25           available e.g. in the pan-European mobile communications system GSM, and these connections may be divided into two classes. In the first class, error correction is carried out solely by means of channel coding, which in the GSM system is termed as Forward  
30           Error Correction (FEC). In the GSM recommendation this is termed as a transparent transfer mode, which is also abbreviated with "T". In the second connection class, in addition to channel coding, an additional protocol is applied, with retransmission of data which has not  
35           been received correctly at the other end. In the GSM

system this communication protocol is termed as a Radio Link Protocol (RLP), and this data transfer mode is referred to as non-transparent asynchronous data transmission, which is also abbreviated with NT. The present invention relates to the non-transparent data transmission.

In the non-transparent asynchronous data transmission over a circuit switched connection, data is transmitted from a transmitting party A to a receiving party B in RLP frames. The RLP frames are channel coded for the duration of transmission, so that the errors caused by the transmission channel can be corrected by the receiving party B in a channel decoding. In addition to the actual user data, RLP frames also contain error correction bits, by means of which the receiving party B can detect the errors that have not been corrected by channel coding. Each RLP frame is also numbered, or the order of the frames is indicated by another kind of identifier. The correctness of each received frame is tested at the receiving end. If the frame is detected to be correct, the receiving party acknowledges the reception by using the frame number. If the frame is not detected to be correct, a negative acknowledgement is transmitted. When the transmitting end receives a negative acknowledgement, or no acknowledgement at all, the transmitting party A re-transmits the RLP frame a predetermined number of times. The total number of the retransmissions is limited in order to avoid endless transmission loops in a case of a very poor connection.

The RLP frames are stored, i.e. "buffered" at the transmitting end until they have been acknowledged, so that they are available if re-transmission is required. In order to limit the amount of buffering required, a sliding window is employed in the RLP

protocol. Thus, the transmitting party A may transmit several RLP frames before an acknowledgement is required from the receiving party B. Since the errors passing through the channel coding are corrected by means of re-transmission of the defective RLP frames, "surplus capacity" must be reserved for re-transmission. This means that the data rate of the non-transparent connection is higher than the nominal data rate of the user. In a case where a channel has a relatively high quality, that is, when there are few errors passing the channel coding, this surplus capacity allows a sufficient number of re-transmissions without the actual data rate of the connection falling below the nominal user data rate. When the quality of the connection becomes poorer, the number of defective and lost RLP frames, and thus the number of re-transmissions increases. On extremely poor connections, buffering of the RLP frames, as well as flow control must be employed, which limits the amount of incoming data from the user to the transmission buffer. This means in practice that the actual user data rate is lower than the nominal user data rate, i.e. the throughput of the connection decreases.

It is thus a problem associated with a poor transmission channel that when the number of re-transmissions increases, the throughput of the connection drops below the nominal user data rate. If the number of re-transmissions further increases, and the maximum number of re-transmissions set for the connection is reached in some frame, it results in resetting of the RLP protocol, whereby parties A and B reset their internal variables related to data transmission. In connection with RLP resetting, information loss may occur, and the continuity of data thus cannot be guaranteed. Data transmission is

practically impossible in the RLP reset -state, which causes releasing the connection.

5           The effect of a poor transmission channel may be reduced by changing a better channel coding scheme for the connection, provided that there are several channel coding alternatives available in the system. E.g. the channel coding scheme FEC used in the GSM system is convolution coding, whose efficiency may be expressed in terms of a convolution code ratio  $X/Y$ ,  
10       which indicates that in channel coding,  $X$  data bits are represented with  $Y$  code bits. On a full-rate GSM traffic channel, for instance, the convolution code ratios corresponding to the user data rates 9.6 kbit/s, 4.8 kbit/s, and 2.4 kbit/s are  $1/2$  ( $1/2$  is a so-called  
15       buffered ratio, i.e. the ratio is not exactly  $1/2$ ),  $1/3$  and  $1/6$ , respectively. On a half-rate traffic channel the corresponding convolution code ratios for user data rates 4.8 kbit/s and 2.4 kbit/s are  $1/2$  and  $1/3$ . Taking  
20       into use a better and more efficient channel coding scheme thus requires lowering the nominal user data rate.

#### **Disclosure of the Invention**

          An object of the invention is to improve the throughput of non-transparent data transmission in poor  
25       transmission path conditions and maintain the nominal data rate and/or the connection in conditions in which prior art non-transparent data transmission fails.

          This is achieved with a method for non-transparent data transmission in a digital telecommunications system, comprising the steps of:  
30       establishing a non-transparent data connection having a nominal data rate, a first transmission capacity and a first channel coding scheme; transmitting data over a non-transparent data connection in data frames using  
35       a communication protocol that acknowledges the

received correct data frames and re-transmits the received defective data frames; buffering the data frames to be transmitted in a transmission buffer; storing a transmitted data frame in the transmission buffer in case of possible re-transmission, until an  
5 acknowledgment of successful reception is received. The invention is characterized by

monitoring the throughput of the non-transparent data connection on the basis of the number  
10 of re-transmissions,

requesting more transmission capacity and a more efficient channel coding scheme for said data connection if the throughput of the data connection drops to a predetermined threshold value.

15 The invention further relates to a telecommunications system in accordance with claim 8.

In the invention, the quality of a non-transparent connection is monitored, and, if the quality of the connection falls to a specific threshold  
20 value, a more efficient channel coding scheme is changed for the connection. More channel capacity is simultaneously allocated for the connection, however, in accordance with the chosen channel coding scheme so that the original nominal user data rate can be  
25 maintained unchanged or nearly unchanged. A half-rate traffic channel, for instance, may be changed for a full-rate traffic channel, and a more efficient channel coding scheme may simultaneously be taken into use. Correspondingly, in a system in which a multichannel  
30 connection can be used, the number of the channels may be increased so that a more efficient channel coding scheme may be taken into use without reducing the nominal data rate.

In an embodiment of the invention, the present  
35 channel coding scheme and channel capacity are

maintained if there is no more channel capacity available. One or more new attempts are made for increasing the channel capacity and changing the channel coding scheme if the quality of the connection is still poor after a predetermined waiting time. In an embodiment of the invention, the channel coding scheme is changed for a more efficient one although there is no more channel capacity available after the new attempts either, if the throughput of the connection still falls below the predetermined threshold value. If the conditions of the connection improve, the surplus channel capacity may be removed from the connection and the original channel coding scheme may be restored. This releases channel capacity for other connections.

#### 15 **Brief Description of the Drawings**

In the following, the invention will be disclosed by means of the preferred embodiments with reference to the attached drawings, in which

Figure 1 illustrates a part of a mobile communications system in which the invention may be applied on a single-channel non-transparent connection,

Figure 2 is a block diagram showing the functional units of a single-channel non-transparent GSM traffic channel in different protocol layers,

Figure 3 shows a L2R PDU,

Figure 4 an RLP frame,

Figure 5 illustrates a part of the GSM mobile communications system in which the invention may be applied on a multichannel non-transparent connection.

#### 30 **Preferred Embodiments of the Invention**

The present invention may be used in all digital data transmission systems on a non-transparent data connection on which transmission errors are corrected, in addition to channel coding, by means of a transmission protocol that re-transmits the frames



and causes the actual data rate to drop below the nominal data rate or the connection to be interrupted when the quality of the connection becomes poorer.

5       The present invention is suitable particularly for data transmission applications in digital CDMA or TDMA mobile communications systems, such as the pan-European digital mobile communications system GSM, DCS1800 (Digital Communication System), a mobile communications system in accordance with EIA/TIA  
10       Interim Standard IS/41.3, etc. The invention will be disclosed below by way of example of the GSM mobile communications system, but the invention is not limited thereto, however. The basic structure of the GSM system will be disclosed briefly below, but no closer  
15       attention will be paid to its features or other aspects of the system. The GSM system is described in more detail in "The GSM System for Mobile Communications", M. Mouly, M. Pautet, Palaiseau, France, 1992, ISBN:2-9507190-0-7, which is incorporated herein by reference.

20       A mobile services switching centre MSC switches incoming and outgoing calls. It carries out tasks similar to the exchange of the public switched telephone network (PSTN). In addition, it also carries out functions typical of mobile telecommunication only,  
25       such as location management of the subscribers in cooperation with the subscriber registers (not shown) of the network. Mobile stations (MS) are connected to the MSC via base station systems BSS. A base station system BSS consists of base station controllers BSC and  
30       base stations BTS.

      The GSM system is a time division multiple access system in which communication on the radio path takes place in successive TDMA frames, each of which consists of several time-slots. In each time-slot a  
35       short information package is sent in form of a radio

frequency burst having a finite duration and consisting of a group of modulated bits. The time-slots are mainly used for transmitting control channels and traffic channels. On traffic channels, speech or data is transmitted. On control channels, signalling is carried out between the base station and the mobile station. The channel structures used in the radio interface of the GSM system are defined in closer detail in the GSM recommendation 05.02. In the operation in accordance with the recommendation, one time-slot is assigned to a mobile station MS as a traffic channel at the beginning of the call (Single Slot Access). The mobile station MS is synchronized with this time-slot for transmitting and receiving radio frequency bursts.

In the GSM system, a data connection is established between a terminal adaptation function (TAF) 31 of the mobile station MS and an interworking function (IWF) 42 of a fixed network (usually associated with the MSC). A data connection is a circuit switched connection, which reserves one (or more) traffic channels from the radio interface for the duration of entire call. In the data transmission of the GSM network, the data connection is a V.110 rate-adapted, V-24 interface-adaptable, UDI coded digital full duplex connection. A V.110 connection is a digital transmission channel that has originally been developed for ISDN technology (integrated Services Data Network), which is defined in CCITT Recommendation Blue Book V.110. A terminal adaptation function TAF adapts a data terminal TE connected to the mobile station MS to the V.110 connection, which is established in Figure 1 over a circuit switched connection that employs one traffic channel ch0. The interworking function IWF adapts the V.110 connection to some other V.110 network, such as ISDN or another GSM network, or to some other transit

network, such as the public switched telephone network PSTN.

5 In addition, channel coding FEC (Forward Error Correction) is employed on the traffic channel for reducing the effect of transmission errors on the radio path. In the GSM system convolution coding in accordance with GSM recommendation 05.03 is employed, and its efficiency can be expressed by means of a convolution coding ratio, which indicates that in  
10 channel coding X data bits are represented with Y code bits. On a full-rate GSM traffic channel, for instance, the convolution code ratios corresponding to the user data rates 9.6 kbit/s, 4.8 kbit/s, and 2.4 kbit/s are 1/2 (buffered), 1/3 and 1/6, respectively.

15 The non-transparent circuit switched connection between the terminal adaptation function (TAF) and the interworking function (IWF) on a GSM traffic channel comprises several protocol layers.

20 The terminal interface between the terminal adaptation function TAF of the mobile station MS and the data terminal equipment, as well as the interface between the interworking function IWF and e.g. an audio modem MODEM comply with CCITT V.24, and it is marked with a symbol L2 in the figure. Protocols that are  
25 essential to the invention are L2R (Layer 2 Relay) and RLP (Radio Link Protocol), which are both located between the terminal adaptation function TAF and the interworking function IWF at both ends of the connection. In accordance with the invention, the  
30 connection also includes several rate adaptation RA functions, such as RA1' between the terminal adaptation function TAF and a CCU unit (Channel Codec Unit) placed in the BSS, RA1 between the CCU unit and the interworking function IWF, RAA between the CCU unit and  
35 a transcoder unit TRAU placed separate from the base

station, and RA2 between the transcoder unit TRAU and the interworking function IWF. The rate adaptation functions RA are defined in GSM specifications 04.21 and 08.20. Communication between the CCU unit and the transcoder unit TRAU is defined in GSM recommendation 08.60.

Information that has been rate adapted at the radio interface RA1' has also been channel coded in the way specified in GSM Recommendation 5.03. This is illustrated by blocks FEC in the mobile station MS and in the CCU unit.

The object of the invention is, however, only the L2R/RLP operation of the terminal adaptation function TAF and the interworking adaptation function IWF and the communication between them. The other lower-layer protocols, functions and units mentioned above only provide a transmission path in accordance with the GSM recommendations between the L2R/RLP units, and they are not relevant to the invention except for channel coding. Therefore, they are not paid closer attention to herein.

L2R (layer 2 Relaying) functionality for non-transparent character-oriented protocols is defined e.g. in GSM Recommendation 07.02. L2R packs the user data and status information received from the terminal interface in protocol data units PDU having a length of 200 bits, or 25 octets. A PDU is illustrated in Figure 3. The octets are numbered from 0 to 24, whereby octet 0 is transmitted first. The bits in octets are numbered from 1 to 8, and bit 1 is transmitted first. An octet in a PDU may be a status octet, a character (higher layer data), or dummy bits. Octet 0 is always a status octet. One status octet contains 3 bits: SA, SB, and X for the status of the V.24 connection, and 5 bits for indicating the number of the data octets subsequent to

the status octet, as well as special indications, such as an empty PDU. In Figure 3, status octet 0 is followed by 3 data octets in which the word "GSM" is packed, whereafter a new status octet 4 follows.

5           L2R PDU's are packed into a frame in accordance with the RLP protocol, which is shown in Figure 4. The RLP protocol is defined in GSM Recommendation 04.22. The RLP is a balanced (HDLC type) data transmission protocol with a frame structure, in  
10           which error correction is based on re-transmission of defective frames on request of the receiving party. The RLP extends from the terminal adaptation function TAF of the MS to the interworking function IWF, which is usually placed in the MSC. In accordance with Figure 4,  
15           the RLP frame structure contains a header field (16 bits), an information field (200 bits) and a frame check sequence (24 bits). A 200-bit L2R PDU is packed into the information field. The net RLP data rate is thus distinctively above the highest possible user rate  
20           9.6 kbit/s allowed for one channel, which enables a certain number of re-transmissions without reducing the nominal user rate. When the user rate in the terminal interface is 9600 kbit/s, for instance, and the data rate in the radio interface is 12 kbit/s, this "surplus capacity" is about 12.5 %.

25           The RLP protocol is also connected with flow control, which is used for controlling the fill level of the reception and transmission buffers. This flow control is described e.g. in GSM Recommendation 07.02.  
30           The L2R/RLP unit of the receiving party B immediately transmits a "flow control active" indication to the transmitting party A if the reception buffer seen from the direction of the radio path reaches a predetermined threshold value or if the terminal equipment TE has  
35           initiated local flow control at the terminal interface.

In the latter case, upon receiving the flow control indication from the terminal interface, L2R/RLP interrupts data transmission from the reception buffer to the terminal interface. When the congestion of the buffer or local flow control is removed, L2R/RLP sends a "flow control inactive" indication. In addition, data transmission from the reception buffer is restarted. The L2R/RLP unit of the transmitting party A activates local flow control immediately when the transmission buffer reaches a predetermined threshold value or when L2R/RLP receives the "flow control active" indication from the receiving party B. When the congestion of the buffer is removed, or when the "flow control inactive" indication is received, L2R/RLP will cancel local flow control. The transmission buffer buffers data received from the V.24 interface so that no data will be lost in case the mobile station MS is not able to transmit data immediately over the radio path. The reception buffer buffers data, which is transmitted to the V.24 interface so that no data received from the traffic channel is lost in case the data cannot be forwarded immediately via the V.24 interface e.g. to the terminal equipment TE. Said predetermined threshold value that activates the flow control can be e.g. a half-full transmission or reception buffer.

As it was stated above, the RLP protocol is attended by the problem that when the quality of the connection becomes poorer, the number of defective and lost frames, and thus the number of re-transmissions increases. On extremely poor connections, buffering of the RLP frames, as well as flow control described above must be employed. In practice this means that the actual use rate is lower than the nominal user data rate, that is, the throughput of the connection decreases.

In accordance with a preferred embodiment of the invention, it has been endeavoured to solve this problem so that the L2R/RLP unit of the transmitting party monitors the quality of the connection by  
5 reducing the throughput of the connection, and advantageously also by monitoring the fill level of the transmission buffer. The number of the re-transmissions of the RLP frames is not limited either, unlike in the RLP protocol in accordance with the GSM  
10 recommendations, so that resetting of the RLP connection is avoided. As stated above, resetting takes place in the present GSM system when the number of re-transmissions reaches the maximum value.

An embodiment will be described herein by way  
15 of example, in which the transmitting party monitors the quality of the connection, changes the channel coding scheme and requests additional capacity. These procedures, however, may alternatively be carried out by the receiving end according to the same principles.  
20 In such a case, either the transmission buffer is not monitored, or the fill level of the transmission buffer is concluded from the "flow control active" indication obtained from the transmitting end.

If the fill level of the transmission buffer  
25 reaches the predetermined value and the throughput drops to the predetermined value, the channel coding scheme FEC of the connection is changed for a more efficient one, and more channel capacity is requested. Due to a better channel coding scheme FEC the residual  
30 error rate that remains to be corrected by the RLP protocol is lower than prior to changing the channel coding scheme. Since radio channel capacity has possibly been increased to meet the needs of the new channel coding scheme, the nominal data rate can be  
35 maintained unchanged or nearly unchanged.

If there is no additional channel capacity available, however, L2R/RLP continues transmitting with the present transmission configuration. A L2R/RLP unit contains a retry timer, however, which is activated at this stage. If the quality of the connection is still the same after the timer has expired, a new attempt is made for increasing the channel capacity, and in case this new attempt fails, the timer is activated again etc. If the throughput of the connection further decreases to a lower predetermined value during this procedure, the channel coding scheme is changed to a more efficient one in any case without additional channel capacity in order to improve error correction. It is thus possible to maintain the connection, even if with a lower user rate. A sensible lower value predetermined for the throughput is some value below the following higher nominal data rate of the channel coding scheme FEC.

If the radio conditions improve again, additional channel resources may be returned and the channel coding scheme may be changed back to the original. The decision on returning the original configuration may be based on a predetermined throughput value.

The channel coding scheme is changed by means of a Channel Mode Modify (CMM) procedure, which is described e.g. in GSM Recommendation 04.08, pp. 53 - 54 and 181 - 182. Both channel allocation and the CMM procedure are controlled in the preferred embodiment of the invention by the MSC, in particular its call control CC (42).



### 1.0 Decision criterion for requesting channel resources

5       Upon monitoring the fill level of the transmission buffer, the activating threshold of the flow control described above is used for activating the request state. In that case, hysteresis is used in order to prevent the flow control from deactivating the request state, that is, once the request state has been activated, it is deactivated only after the fill level  
10       of the buffer has decreased to the lower threshold value.

      Monitoring of the throughput is based on calculating the re-transmission rate of the frames. Since the transmission buffer is half-full, the RLP  
15       continuously transmits at the full rate. This rate is known on the basis of the channel capacity, e.g. in the case of one full-rate GSM traffic channel the rate is one frame/20 ms (50 frames/second). If, for instance, 55 % of the last transmitted frames are re-transmissions, 45 % of the capacity will be used for  
20       new frames.

      Monitoring the throughput may also be based on calculating the "sliding or floating" of the success ratio e.g. with an equation:

25                     
$$AVE(n+1) = AVE(n) * (1-D) + MEAS * D$$

where     AVE(i) is an average value at instant i,  
          D is a "history co-efficient" ( $0 < D < 1$ ),  
          MEAS is the last "measurement",  
30        MEAS = 1 represents a successfully acknowledged transmission,  
          MEAS = 0 represents re-transmission of a frame,  
           $0 \leq AVE(i) \leq 1$ .

## **2.0 Decision criterion for releasing channel resources**

Additional channel resources are released when user data transmission has continued at a full rate and with an average success ratio  $AVE(i)$  which is greater than the predetermined value (e.g. 0.8) for a predetermined period of time, e.g. 10 seconds or 100 seconds. This criterion maintains the additional allocated channel resources even in a case where the terminal equipment has temporarily stopped transmitting data. A pendulum between releasing channel resources and requesting channel resources is thus avoided, and channel resources are only released after actual improvement of the radio conditions.

The present invention may be applied both to single-channel service and multichannel high-speed circuit switched data service (HSCSD). In the following, both cases will be described by means of examples.

## **3.0 Application to a single-channel service, based on a half-rate channel**

In the GSM system, it is possible to choose a so-called half-rate (max. 4.8 kbit/s) traffic channel (HR) for low rates. A half-rate traffic channel is established when a mobile station MS operates in a certain time-slot only in every second frame, i.e. at the half rate. There is another mobile station operating in every second frame of the same time-slot.

Let us assume that the mobile station Ms has a non-transparent circuit switched connection on a half-rate GSM traffic channel. Data transmission in accordance with the invention will be disclosed in the following assuming that the terminal adaptation function TAF is the transmitting party A and the interworking function IWF is the receiving party B. It

must be noted, however, that data transmission takes place in the same way in the opposite direction IWF-TAF, as well.

5           The L2R/RLP unit of the transmitting party A continuously monitors the fill level of the transmission buffer and the throughput of the connection. When the quality of the connection becomes poorer and the number of error increases, the following events take place:

10           1) the number of re-transmissions of the RLP frames increases,

            2) the fill level of the transmission buffer reaches the flow control activation level, whereby the flow control is activated,

15           3) the number of the re-transmissions of single frames reaches a predetermined maximum value, but, in accordance with the invention, this is disregarded,

20           4) The throughput of the connection drops to a decision value, which is a value between the original nominal user rate and a half of the original nominal user rate.

            When conditions 2 and 4 are both valid, the L2R/RLP unit of the transmitting party A requests a  
25           change of the channel coding scheme by means of a CMM procedure, and changing the traffic channel to a full-rate traffic channel in order to maintain the original nominal data rate. After a successful CMM procedure and allocation of a full-rate traffic channel, data  
30           transmission continues at the original data rate, but with a better channel coding scheme FEC.

            When the channel coding scheme has been changed for a more efficient one, the L2R/RLP unit of  
35           the transmitting party A continuously monitors the throughput of the connection for returning the original

channel coding scheme and channel resources if the radio conditions change.

Example 1. Communication takes place on a half-rate GSM traffic channel on which the original user rate is 4.8 kbit/s and the radio interface rate is 6 kbit/s. When the throughput of the connection drops below the decision value, e.g. to 4 kbit/s, the fill level of the transmission buffer reaches the flow control activation level, and the flow control is activated. The L2R/RLP unit then requests the CMM procedure for changing for a full-rate traffic channel having a user rate of 4.8 kbit/s and the radio interface rate of 12 kbit/s. Data transmission thus continues at the original user rate, but with a more efficient channel coding scheme FEC, as the convolution code ratio of a full-rate channel is 1/3 with user rate 4.8 kbit/s, whereas that of a half-rate channel is 1/2.

If the requested full-rate channel is not available, data transmission continues on the existing half-rate traffic channel. The L2R/RLP activates the retry timer. If the present conditions are still valid after the timer has expired, a new attempt is made for increasing the channel capacity, and, if the new attempt fails, the timer is re-activated etc. If the throughput of the connection still drops to the lowest predetermined decision value, the channel coding scheme of a half-rate traffic channel is changed for a more efficient one with the CMM procedure. A sensible value for said lower predetermined decision value is below a half of the original nominal user rate.

Example 2. Data transmission takes place on a half-rate traffic channel on which the original user rate is 4.8 kbit/s, the radio interface data rate is 6 kbit/s and  $FEC=1/2$ . When the quality of the connection becomes poorer, the throughput drops below 2.4 kbit/s,

and the fill level of the transmission buffer reaches the flow control activation level, and the flow control is activated. Simultaneously, the number of the re-transmissions of single frames may reach the predetermined maximum value, but this is disregarded in accordance with the invention. The L2R/RLP unit requests a CMM procedure for changing the traffic channel for a configuration having a user rate of 2.4 kbit/s and the radio interface rate of 3.6 kbit/s. Thereafter, data transmission takes place on a half-rate traffic channel at a lower nominal data rate 2.4 kbit/s, but, correspondingly with a more efficient channel coding scheme  $FEC=1/3$ .

#### **4.0 Application to a single-channel service based on a full-rate channel**

Let us assume that a mobile station MS has an ongoing non-transparent circuit switched data connection on a full-rate traffic channel. The L2R/RLP unit of the transmitting party A continuously monitors the fill level of the transmission buffer, as well as the throughput of the connection. When the quality of the connection becomes poorer and the number of errors decreases, the following events take place:

- 1) the number of re-transmissions of the RLP frames increases,
- 2) the fill level of the transmission buffer reaches the flow control activation level, and the flow control is activated,
- 3) the number of the re-transmissions of single frames reaches a predetermined maximum value, but, in accordance with the invention, this is disregarded,
- 4) The throughput of the connection drops to a decision value, which is below a half of the original nominal user rate.

When conditions 2 and 4 are both valid, the L2R/RLP unit of the transmitting party A requests a change of the channel coding scheme by means of a CMM procedure. After a successful CMM procedure, data transmission continues on the same single traffic channel at a lower nominal data rate (half of the original), but with a better channel coding scheme FEC.

After changing for a more efficient channel coding scheme, the L2R/RLP unit continuously monitors:

- fill level of the transmission buffer as well as the throughput of the connection for detecting a possible need to change for an even better channel coding scheme,

- the throughput of the connection for returning the faster transmission rate if the radio conditions change.

This can be illustrated with example 3. The original user rate of a full-rate channel is 9.6 kbit/s, the radio interface rate is 12 kbit/s, and FEC=1/2. The throughput of the connection drops below 4.8 kbit/s and the fill level of the transmission buffer reaches the flow control activation level, and flow control is activated. Thus, the L2R/RLP unit requests a CMM procedure, which changes the user rate to 4.8 kbit/s and the radio interface rate to 12 kbit/s. Thereafter, data transmission continues at a lower nominal user rate, but with a more efficient channel coding FEC=1/3.

#### **5.0 Application to a multichannel high-speed data transmission**

The highest allowable user data rate on one GSM traffic channel is limited to 9.6 kbit/s.

The previous applications FI-942,190 and FI-945,817 of the applicant disclose a procedure in which two or more time-slots are allocated from the same TDMA

frame to a mobile station MS that requires data transmission at a higher transfer rate than what can be provided on one traffic channel. The maximum user rate on a multichannel data connection is the number of parallel traffic channels x the user rate 9.6 kbit/s of one traffic channel. Thus, e.g. a user rate of 19.2 kbit/s can be provided by two traffic channels at the minimum. This procedure is disclosed in this application as an example of carrying out high-speed data transmission based on a plurality of parallel traffic channels in a radio system. As to the closer details of this procedure, reference is made to the above-mentioned applications. It must be noted, however, that the only thing relevant to the invention is the possibility to establish a multichannel transmission connection, and the object of the invention is thus primarily to change the efficiency of the channel capacity and the channel coding scheme when the quality of the connection varies.

Figure 5 illustrates the architecture of the GSM network implementing this kind of data transmission employing a plurality of parallel traffic channels. Figure 5 is similar to Figure 1 except for the fact that in Figure 5, between the terminal adaptation function TAF and the interworking function IWF there is a circuit switched non-transparent connection consisting of N parallel traffic channels ch0-chn, wherein N=1, 2, 3, ... In the mobile station, the TAF acts as a divider, distributing the incoming high-speed data signal DATA IN from the data terminal equipment into parallel traffic channels ch0-chn, as well as a combiner, which combines the low-speed subsignals received from the parallel traffic channels ch0-chn again with the high-speed data signal DATA OUT. Correspondingly, at the second end of the multichannel

data connection, the IWF acts as a distributor distributing the incoming high-speed data signal DATA IN to parallel traffic channels ch0-chn, and as a combiner, which combines the low-speed data signals received from the parallel traffic channels again with a high-speed data signal DATA OUT.

The protocol structure shown in Figure 2 also holds for multichannel connection architecture shown in Figure 5. In the preferred embodiment of the invention, the L2R/RLP unit is common to all traffic channels allocated for the same connection, also acting as the distributor and combiner mentioned above. Each traffic channel has, however, rate adaptation (RA) and channel coding (FEC) functions of their own in accordance with Figure 2. A multichannel data connection is thus substantially similar to the single-channel data connection from the point of view of the L2R/RLP unit. The "transmission channel" between the L2R/RLP units only has a larger capacity than before.

In the following, the operation of the L2R/RLP unit will be disclosed in more detail. A mobile station has an ongoing non-transparent circuit switched data connection comprising one or more traffic channels in a system that is capable of high-speed multichannel data transmission. The L2R/RLP unit of the transmitting party A continuously monitors the fill level of the transmission buffer and the throughput of the connection. When the quality of the connection becomes poorer and the number of errors increases, the following events take place:

- 1) the number of re-transmissions of the RLP frames increases,
- 2) the fill level of the transmission buffer reaches the flow control activation level, and the flow control is activated,



3) the number of the re-transmissions of single frames reaches a predetermined maximum value, but, in accordance with the invention, this is disregarded,

5           4) The throughput of the connection drops to a decision value. The decision value may be some value between the current nominal user rate and a half of the current nominal user rate as it is possible to request more channel capacity in order to compensate the  
10       decreased data rate on a single traffic channel due to changing for a more efficient channel coding scheme.

          When both 2) and 4) are valid, the L2R/RLP unit of the transmitting party A requests increasing of the channel capacity and changing for a more efficient  
15       channel coding scheme by means of a CMM procedure. If e.g. one traffic channel is currently in use, a second traffic channel is requested from the same carrier wave. After a successful channel allocation and CMM  
20       procedure data transmission continues at the same or almost the same data rate as originally, but with a better channel coding scheme FEC.

          Additional channel capacity may be requested depending on the original channel capacity e.g. in the following way:

25

30

original capacity	requested additional capacity
1	1
2	2
3	3
4	4
5	3
6	2
7	1

10

15

20

25

30

The decision value of the throughput is different in cases in which it is not possible to double the channel capacity, since the original nominal user rate cannot be reached after the CMM procedure and changing the channel coding scheme. As a rule, it can be stated that the lower the percentage of the additional traffic channels, the lower the decision value for the throughput is by means of which the change of the channel coding scheme and additional channel capacity are requested.

After changing for a more efficient channel coding scheme, the L2R/RLP unit of the transmitting party A continuously monitors:

- the fill level of the transmission buffer and the throughput of the connection for detecting a possible need for changing for a more efficient channel coding scheme and requesting additional capacity,

- the throughput of the connection for detecting a possibility to restore the higher speed channels and release the additional channel resources if the radio conditions improve.

This can be illustrated with example 4. Let us

assume that a non-transparent data connection has been established on one full-rate traffic channel on which the original user rate is 9.6 kbit/s, the radio interface rate is 12 kbit/ and  $FEC=1/2$ . The throughput of the connection drops below the predetermined decision value, e.g. 8 kbit/s, and the fill level of the transmission buffer reaches the flow control activation level, and flow control is thus activated. Simultaneously, the number of re-transmissions of single frames may reach the predetermined maximum value, but this is disregarded in accordance with the invention. The L2R/RLP unit then requests one more full-rate traffic channel having a user rate of 4.8 kbit/s, a radio interface rate of 12 kbit/s and  $FEC=1/3$ . In addition, the L2R/RLP unit requests a CMM procedure by means of which the original traffic channel is changed for a configuration having a user rate of 4.8 kbit/s, a radio interface rate of 12 kbit/s, and  $FEC=1/3$ . Thereafter, data transmission continues on two traffic channels at a total nominal data rate of  $4.8 + 4.8$  kbit/s = 9.6 kbit/s (the original nominal user rate), and with a more efficient channel coding scheme  $FEC = 1/3$ .

Provided that the requested additional channels are not available, data transmission continues with the present channel configuration. The L2R/RLP activates the retry timer, however. If the same situation continues still after the timer has expired, a new attempt is made for increasing the channel capacity, and if the new attempt fails, the timer is re-started etc. If the throughput of the connection still weakens to a lower predetermined decision value, the channel coding scheme of each available traffic channel is changed for a more efficient one by means of a CMM procedure. A sensible lower predetermined

decision value is a value below a half of the original nominal user rate.

This may be illustrated with example 5. Let us assume that there is an ongoing non-transparent data connection on two parallel traffic channels where the original user rate of the connection is 19.2 kbit/s, the radio interface rate is 12 kbit/s on both traffic channels, and FEC= 1/2. Thereafter, the throughput of the connection drops below 9.6 kbit/s, and the fill level of the transmission buffer reaches the flow control activation level, and flow control is activated. The number of re-transmissions of individual frames may thus reach a predetermined maximum value, but this is disregarded. There are no additional traffic channels available, in which case the L2R/RLP unit requests a CMM procedure, which will change the configuration of the present traffic channels so that the user rate is 4.8 kbit/s, the radio interface rate 12 kbit/s, and FEC=1/3. Thereafter, data transmission continues on these two traffic channels at a lower combined nominal data rate  $4.8 + 4.8 = 9.6$  kbit/s, but correspondingly with a more efficient channel coding scheme FEC=1/3.

#### **6.0 Flexible application to a high-speed multichannel data service**

Let us assume that a mobile station MS has an ongoing non-transparent circuit switched connection on one or more traffic channels in a system that is capable of high-speed multichannel data transmission. In such a case, the L2R/RLP unit of the transmitting party A continuously monitors the fill level of the transmission buffer and the throughput of the connection. When the quality of the connection becomes poorer and the number of errors increases, the number of re-transmissions of RLP frames increases. At some

stage, the fill level of the transmission buffer reaches the flow control activation level, and flow control is thus activated. The number of re-transmissions of individual frames can also reach the predetermined maximum value, but it is disregarded. The throughput of the connection drops below the predetermined maximum decision value. The L2R/RLP unit then requests increasing the number of radio channels. If the required channel capacity is available, the procedure continues as above in 4.0. If the requested channel capacity is not available, the decision value of throughput is decreased stepwise, and data transmission continues with the present channel configuration. If the combined throughput drops to a new decision value, a corresponding amount of additional capacity is requested, which is less than the additional capacity corresponding to the maximum decision value. If this additional capacity is available, the procedure continues as in the case described above. If the requested additional capacity is not available, the throughput value is further decreased stepwise and data transmission is continued with the present channel configuration until the throughput reaches a new decision value.

Although the invention has been disclosed with reference to some specific embodiments, it is obvious that the description is only made by way of example, the disclosed embodiments allowing alterations and modifications without deviating from the scope and the spirit of the invention set forth in the attached claims.

## Claims:

1. A method for non-transparent data transmission in a digital telecommunications system, comprising the steps of:
- 5 establishing a non-transparent data connection having a nominal data rate, a first transmission capacity and a first channel coding scheme;
- 10 transmitting data over a non-transparent data connection in data frames using a communication protocol that acknowledges the received correct data frames and re-transmits the received defective data frames;
- 15 buffering the data frames to be transmitted in a transmission buffer;
- storing a transmitted data frame in the transmission buffer in case of possible re-transmission, until an acknowledgement of successful reception is received, c h a r a c t e r i z e d by
- 20 monitoring the throughput of the non-transparent data connection on the basis of the number of re-transmissions,
- requesting more transmission capacity and a more efficient channel coding scheme for said data connection if the throughput of the data connection drops to a predetermined threshold value.
- 25 2. A method as claimed in claim 1, c h a r a c t e r i z e d by
- 30 monitoring the fill level of the transmission buffer,
- requesting more transmission capacity and a more efficient channel coding scheme for said data connection if the throughput of the data connection drops to a predetermined threshold value and the fill level of the transmission buffer reaches a
- 35

predetermined threshold level.

3. A method as claimed in claim 1 or 2, c h -  
a r a c t e r i z e d by

5 changing a more efficient channel coding  
scheme for the data connection,

allocating more transmission capacity for the  
data connection corresponding to the more efficient  
channel coding scheme so that the original nominal user  
rate remains unchanged or nearly unchanged.

10 4. A method as claimed in claim 1 or 2, c h -  
a r a c t e r i z e d by

maintaining the first transmission capacity  
and the first channel coding scheme if the requested  
additional capacity is not available, which capacity is  
15 required with a more efficient channel coding scheme  
for maintaining the original nominal user rate  
unchanged or nearly unchanged.

5. A method as claimed in claim 2, c h a r -  
a c t e r i z e d by

20 maintaining the first channel coding scheme if  
the requested additional channel capacity is not  
available,

repeating the request for more additional  
capacity and a more efficient channel coding scheme at  
25 regular time intervals if the throughput of the data  
connection does not increase from said predetermined  
threshold value and if the fill level of the  
transmission buffer does not decrease from said  
predetermined threshold level,

30 changing the channel coding scheme for a more  
efficient one without allocating more transmission  
capacity if the throughput of the data connection  
decreases to a predetermined second threshold level  
which is lower than the former threshold value.

35 6. A method as claimed in claim 4, c h a r -

a c t e r i z e d   b y

maintaining the first channel coding scheme if the requested additional transmission capacity is not available,

5                reducing said predetermined threshold value for the throughput,

              requesting more transmission capacity and a more efficient channel coding scheme for said data connection if the throughput of the connection drops to  
10                said reduced threshold value and if the fill level of the transmission buffer has not decreased below said predetermined threshold value.

              7. A method as claimed in any one of the preceding claims 1-6, c h a r a c t e r i z e d   b y  
15                allocating one or more traffic channels to the data connection as additional transmission capacity.

              8. A digital telecommunications system comprising a transmitting party (A) having a transmission buffer, a receiving party (B), a non-transparent circuit switched data connection between  
20                the transmitting party and the receiving party, channel coding means (FEC) on said data connection, and a communication protocol (RLP) in which data is transmitted over said data connection in data frames so  
25                that the received correct data frames are acknowledged and the received defective data frames are re-transmitted, said transmission buffer buffering the data frames to be transmitted and storing the transmitted data frames until it receives an  
30                acknowledgement of successful reception, c h a r a c t e r i z e d   i n   t h a t   t h e   t r a n s m i t t i n g   p a r t y   (A)   o r   t h e   r e c e i v i n g   p a r t y   (B)   i s   a r r a n g e d   t o   m o n i t o r   t h e   t h r o u g h p u t   o f   t h e   n o n - t r a n s p a r e n t   d a t a   c o n n e c t i o n   o n   t h e   b a s i s   o f   t h e   n u m b e r   o f   r e - t r a n s m i s s i o n s ,   a n d   t h a t  
35                the transmitting (A) or the receiving (B) party is



arranged to request more transmission capacity and a more efficient channel coding scheme for the data connection in question if the throughput of the data connection drops to a predetermined threshold value.

5           9. A method as claimed in claim 8, c h a r -  
a c t e r i z e d in that the transmitting party (A)  
is arranged to monitor the fill level of the  
transmission buffer, and that the transmitting party  
(A) is arranged to request more transmission capacity  
10 and a more efficient channel coding scheme for said  
data connection if the throughput of the data  
connection drops to a predetermined threshold value and  
the fill level of the transmission buffer increases to  
a predetermined threshold value.

15           10. A method as claimed in claim 8 or 9, c h -  
a r a c t e r i z e d in that the amount of the  
requested additional capacity is such that the original  
nominal user data rate remains unchanged or nearly  
unchanged after changing for a more efficient channel  
20 coding scheme.

          11. A method as claimed in claim 8 or 9, c h -  
a r a c t e r i z e d in that the method is a multiple  
access mobile communication system in which the data  
connection comprises one traffic channel (ch0) on the  
25 radio path, and that increasing the transmission  
capacity of the data connection includes changing a  
half-rate traffic channel for a full-rate traffic  
channel.

          12. A method as claimed in claim 8 or 9, c h -  
30 a r a c t e r i z e d in that the system is a multiple  
access mobile communication system in which the data  
connection comprises one traffic channel (ch0) or a  
plurality of traffic channels (ch0-chn) on the radio  
path, and that increasing the transmission capacity of  
35 the data connection includes increasing the number of

the traffic channels allocated for the data connection.

13. A method as claimed in any one of the claims 8-12, characterized in that the transmitting party is the terminal adaptation function (TAF) of the mobile station (MS), and the receiving party is the interworking function (IWF) of the mobile communication network.

14. A method as claimed in any one of the claims 8-13, characterized in that the transmitting party is the interworking function (IWF) of the mobile communication network, and the receiving party is the terminal adaptation function (TAF) of the mobile station (MS).

15

20

25

30

35

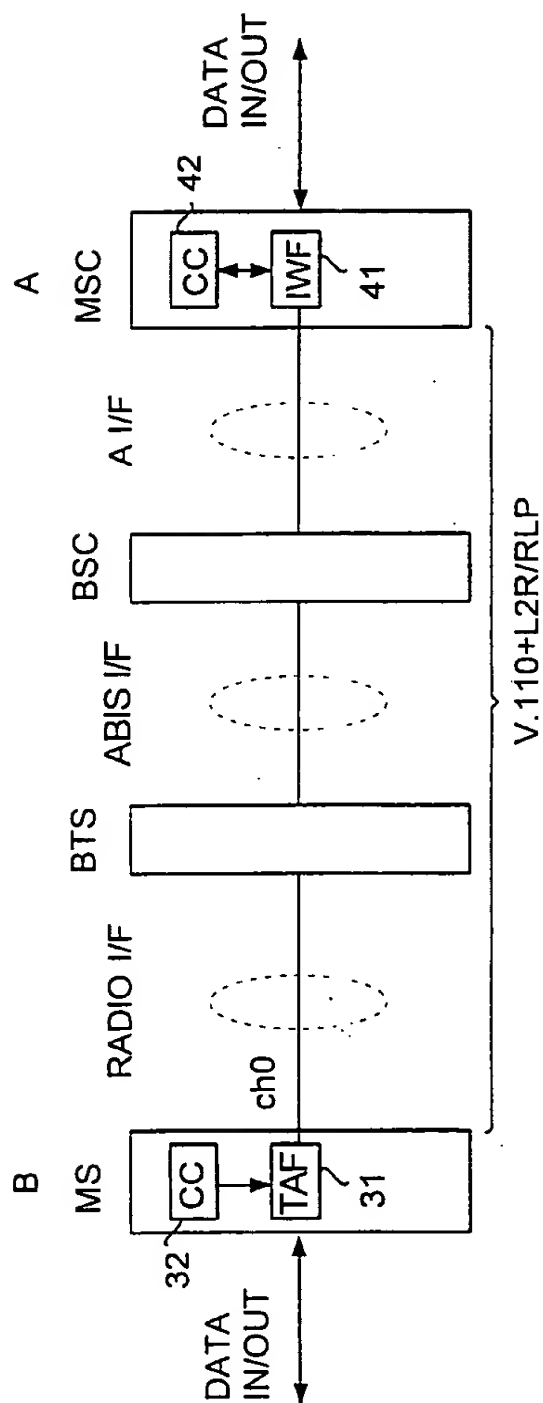


FIG. 1

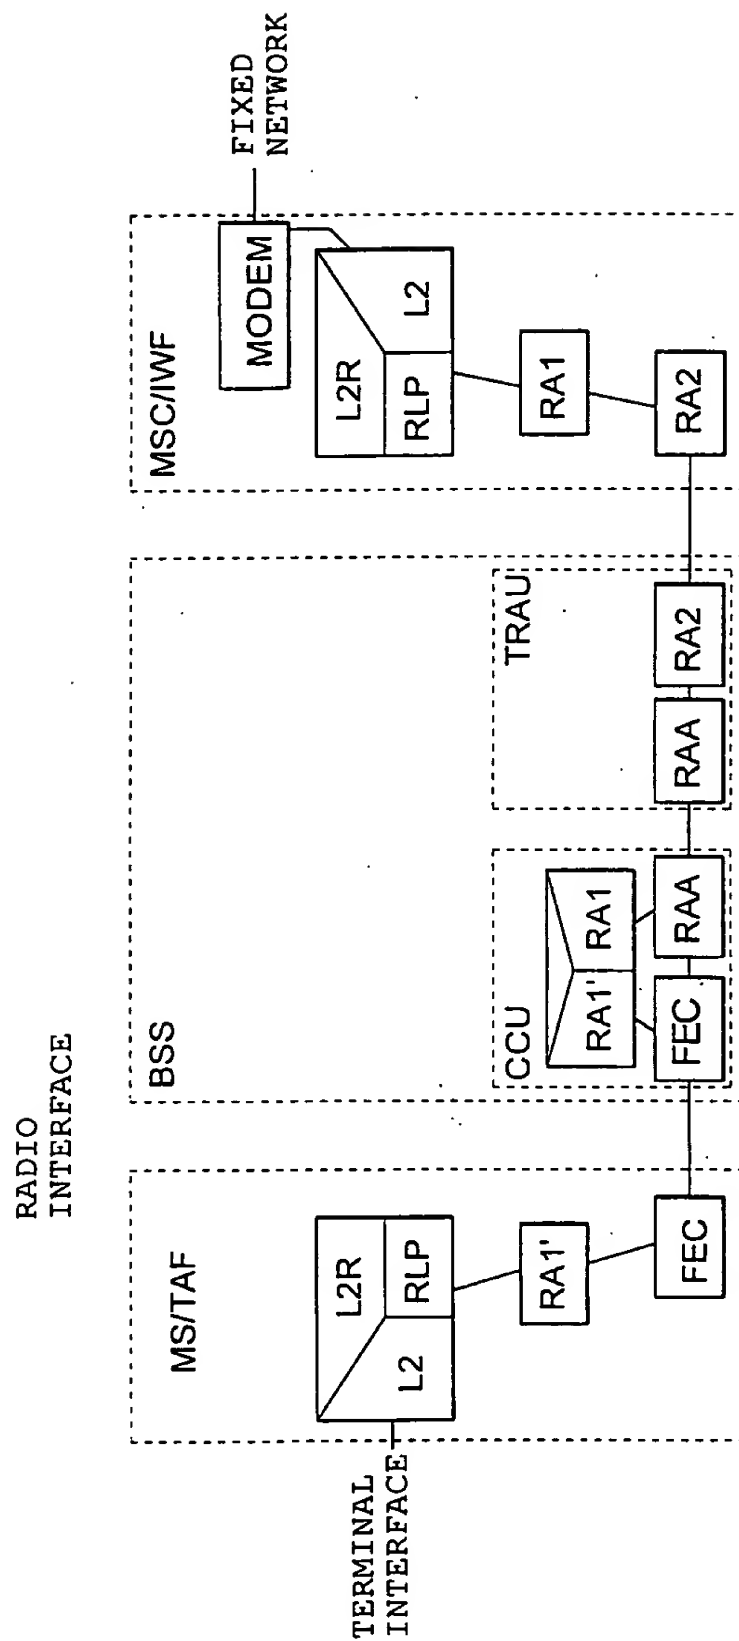


FIG.2

	3/4								
	8	7	6	5	4	3	2	1	
0	SA	SB	X	0	0	0	1	1	
1	1	1	0	0	0	1	1	1	IA5 "G"
2	1	1	0	1	0	0	1	1	IA5 "S"
3	1	1	0	0	1	1	0	1	IA5 "M"
4	SA	SB	X	1	1	1	1	1	
n									

FIG. 3



FIG. 4

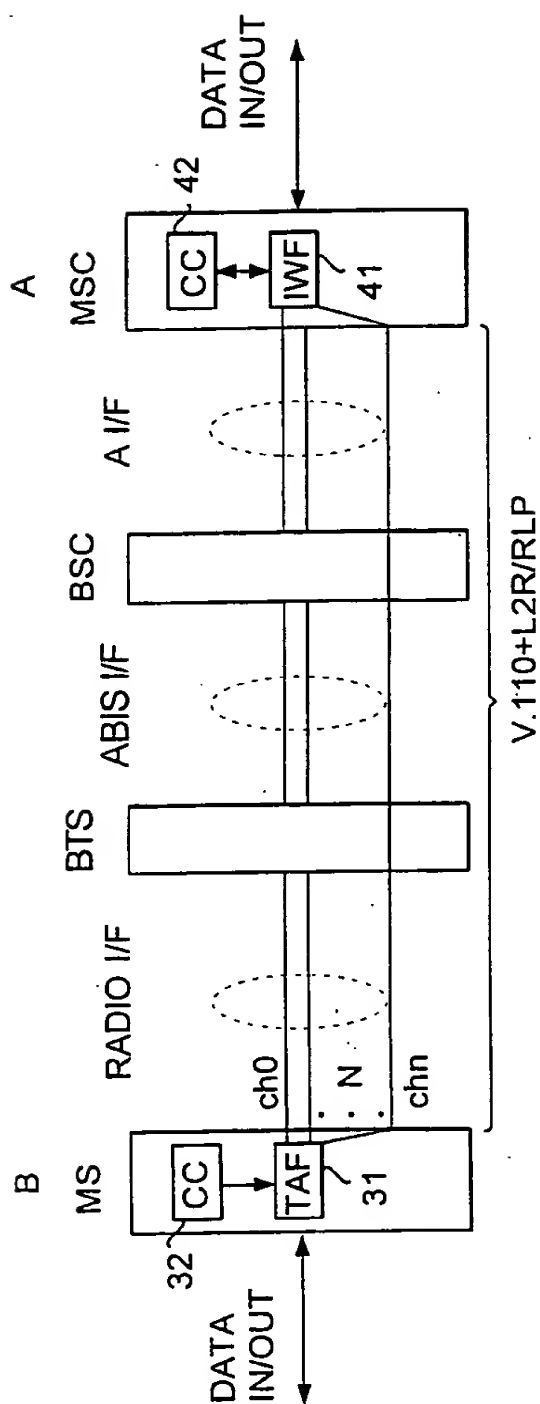


FIG. 5

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00259

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
IPC6: H04L 1/12 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4691314 A (LEWIS A. BERGINS ET AL), 1 Sept 1987 (01.09.87), abstract --	1,8
A	DE 3933262 A1 (ROBERT BOSCH GMBH), 11 April 1991 (11.04.91), column 1, line 18 - line 25 --	1-6,8-10
A	EP 0350238 A2 (OMRON TATEISI ELECTRONICS CO.), 10 January 1990 (10.01.90), column 6, line 12 - line 23, abstract --	1,8
A	US 4939731 A (ALLYSON REED ET AL), 3 July 1990 (03.07.90), abstract --	1,8
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
30 August 1996		02-09-1996
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer  Bengt Jonsson Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 96/00259

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0260470 A2 (RACAL DATA COMMUNICATIONS, INC.), 23 March 1988 (23.03.88), abstract  -----	2,6,9



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

31/07/96

International application No.  
PCT/FI 96/00259

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4691314	01/09/87	NONE	
DE-A1- 3933262	11/04/91	DE-D- 59009434 EP-A,B- 0423485 SE-T3- 0423485 ES-T- 2075862	00/00/00 24/04/91 16/10/95
EP-A2- 0350238	10/01/90	JP-A- 2016827	19/01/90
US-A- 4939731	03/07/90	AU-B- 594216 AU-A- 8234787 CA-A- 1303678 DE-A- 3776332 EP-A,B- 0290525 SE-T3- 0290525 WO-A- 8804496	01/03/90 30/06/88 16/06/92 05/03/92 17/11/88 16/06/88
EP-A2- 0260470	23/03/88	JP-A- 63087048 US-A- 4771417 US-A- 4924456	18/04/88 13/09/88 08/05/90